

(19)

Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 024 012 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

02.08.2000 Bulletin 2000/31

(51) Int. Cl.⁷: B41J 2/47

(21) Application number: 00101301.0

(22) Date of filing: 22.01.2000

(84) Designated Contracting States:

DE FR GB IT NL

Designated Extension States:

AL LT LV MK RO SI

(30) Priority: 26.01.1999 JP 1746399

(71) Applicant:

CANON KABUSHIKI KAISHA

Tokyo (JP)

(72) Inventors:

- Yoshida, Hiroki
Ohta-ku, Tokyo (JP)
- Ishibe, Yoshihiro
Ohta-ku, Tokyo (JP)


(74) Representative: Weser, Wolfgang

Weser & Kollegen,
Patentanwälte,
Radeckestrasse 43
81245 München (DE)

(54) **Optical scanning apparatus and image forming apparatus and electrophotographic printer using such scanning apparatus**

(57) An optical scanning apparatus is capable of scanning a surface with a plurality of fluxes of light along a principal scanning direction. In the apparatus, a plurality of fluxes of light are emitted by a plurality of light sources arranged at intervals along an auxiliary scanning direction perpendicular to the principal scanning direction. The plurality of fluxes of light are lead to an optical deflector via an optical system for incident light and deflected by the optical deflector. Most part of the deflected fluxes of light are lead to the surface via an imaging optical system for scanning the surface, while small part of the deflected fluxes of light are lead to a photodetector to generate a synchronizing signal for controlling the timing of the scanning start of each of the fluxes of light. A slit is arranged between the optical deflector and the photodetector and the slit is inclined relative to the auxiliary scanning direction, whereby the scanning start timings for the plurality of fluxes of light are adjusted. The optical scanning apparatus is used in an image forming apparatus or an electrophotographic printer.

FIG. 1

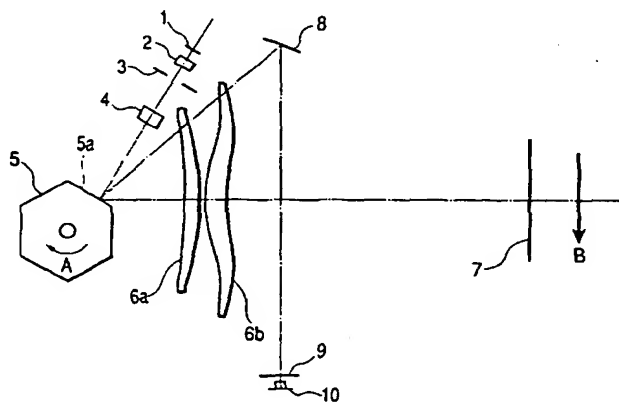

EP 1 024 012 A2

Description

BACKGROUND OF THE INVENTION

Field of the Invention

[0001] This invention relates to an optical scanning apparatus adapted to scan a surface to be scanned by means of a plurality of fluxes of light and also to an image forming apparatus such as a laser beam printer or a digital copying machine and an electrophotographic printer using such an optical scanning apparatus.

Related Background Art

[0002] In many conventional optical scanning apparatus that are used in image forming apparatus, the flux of light emitted from a light source is led to a deflection means by way of an optical means for incident light and the flux of light deflected by the deflection means is focussed on the surface to be scanned to form a spot of light there, which is then used to scan the surface by a scanning optical means.

[0003] In the course of technological development in recent years in the field of image forming apparatus, seeking for higher performances and higher functions, there has been and still is a strong demand for optical scanning apparatus that are compact and operate at high speed. An idea for meeting the demand for high speed operation is the use of a plurality of light sources. On the other hand, the demand for down-sizing may be met by converging the flux of light to be led to the deflection means along the principal scanning direction of the scanning optical means.

[0004] Japanese Patent Application Laid-Open No. 9-54263 discloses an optical scanning apparatus proposed to meet the demand for high speed operation. In the proposed optical scanning apparatus, a plurality of fluxes of light are emitted in a linear array from a single multi-beam laser chip. Japanese Patent Application Laid-Open No. 5-45580 discloses an optical scanning apparatus proposed to meet the demand for down-sizing. In the proposed optical scanning apparatus, the flux of light emitted from a light source is converged to a point of spontaneous convergence located behind the surface to be scanned by means of a focussing optical system.

[0005] However, optical scanning apparatus using a plurality of light sources are accompanied by the problem that the scanning start points of the fluxes of light from the light sources can be displaced from each other. While this problem may be dissolved by providing different time lags for the synchronizing signal to be applied to the light sources in order to cause the latter to start their respective scanning operations with the time lags. However, the time lags will have to be provided electrically or by means of software for each light source to make the overall configuration very complex and limit

the scanning speed of the apparatus.

[0006] On the other hand, optical scanning apparatus designed to converge the fluxes of light led to the deflection means along the principal scanning direction utilize a rotary polyhedral mirror having its center of rotation located off the deflection plane as deflection means. If the fluxes of light from the optical means for incident light are convergent or divergent in such an arrangement, while the scanning start points can be aligned along the principal scanning direction, the deflection points may be shifted relative to the optical axis of the optical means for incident light to shift the points of spontaneous convergence as the rotary polyhedral mirror rotate. Thus, an image forming apparatus comprising such an optical scanning apparatus may have the spot images of the light sources displaced relative to the principal scanning direction as the rotary mirror rotates to make it impossible to form a high quality image.

SUMMARY OF THE INVENTION

[0007] In view of the technological problems of the prior art, it is therefore the object of the present invention to provide an optical scanning apparatus that can prevent any displacement of the scanning start points of the plurality of fluxes of light emitted from so many light sources from occurring by a simple means and also to provide an image forming apparatus and an electrophotographic printer comprising such an optical scanning apparatus.

[0008] In an aspect of the present invention, the above object is achieved by providing an optical scanning apparatus for scanning a surface to be scanned with a plurality of fluxes of light along a principal scanning direction, the apparatus comprising:

- a plurality of light sources arranged at intervals along an auxiliary scanning direction perpendicularly to the principal scanning direction;
 - an optical deflector for deflecting the plurality of fluxes of light emitted from the plurality of light sources;
 - an optical system for incident light adapted to lead the plurality of fluxes of light emitted from the plurality of light sources to the optical deflector;
 - an imaging optical system for forming images of the plurality of fluxes of light deflected by the optical deflector on the surface to be scanned;
 - a photodetector for detecting part of the plurality of fluxes of light deflected by the optical deflector and outputting a synchronizing signal for controlling the timing of the scanning start of each of the fluxes of light; and
 - a slit arranged between the optical deflector and the photodetector;
- the slit being inclined relative to the auxiliary scanning direction.

[0009] In another aspect of the invention, there is provided an image forming apparatus for forming an image by scanning the surface to be imaged with a plurality of fluxes of light along a principal scanning direction, the apparatus comprising:

a plurality of light sources arranged at intervals along an auxiliary scanning direction perpendicular to the principal scanning direction;
 a central processing unit for driving the plurality of light sources independently relative to each other according to an image signal;
 an optical deflector for deflecting the plurality of fluxes of light emitted from the plurality of light sources;
 an optical system for incident light adapted to lead the plurality of fluxes of light emitted from the plurality of light sources to the optical deflector;
 an imaging optical system for forming images of the plurality of fluxes of light deflected by the optical deflector on the surface to be imaged;
 a photodetector for detecting part of the plurality of fluxes of light deflected by the optical deflector and outputting a synchronizing signal for controlling the timing of the scanning start of each of the fluxes of light; and
 a slit arranged between the optical deflector and the photodetector;
 the slit being inclined relative to the auxiliary scanning direction.

[0010] In still another aspect of the invention, there is provided an electrophotographic printer for forming an image by scanning the surface of a photosensitive body with a plurality of fluxes of light along a principal scanning direction, the apparatus comprising:

a plurality of light sources arranged at intervals along an auxiliary scanning direction perpendicular to the principal scanning direction;
 a central processing unit for driving the plurality of light sources independently relative to each other according to an image signal;
 an optical deflector for deflecting the plurality of fluxes of light emitted from the plurality of light sources;
 an optical system for incident light adapted to lead the plurality of fluxes of light emitted from the plurality of light sources to the optical deflector;
 a photodetector for detecting part of the plurality of fluxes of light deflected by the optical deflector and outputting a synchronizing signal for controlling the timing of the scanning start of each of the fluxes of light;
 a slit arranged between the optical deflector and the photodetector, the slit being inclined relative to the auxiliary scanning direction;
 a developing unit for developing an electrostatic

latent image formed by scanning the surface of the photosensitive body with the plurality of fluxes of light;

an image transfer unit for transferring the developed toner image onto paper;

a fixing unit for fixing the toner image transferred on the paper.

BRIEF DESCRIPTION OF THE DRAWINGS

[0011]

FIG. 1 is a schematic plan view of an embodiment of optical scanning apparatus according to the invention.

FIG. 2 is a schematic illustration of the light source unit of the embodiment of FIG. 1, showing the positional arrangement of the light sources.

FIG. 3 is a schematic perspective view of the embodiment of FIG. 1.

FIG. 4 is a schematic cross sectional view of an embodiment of electrophotographic printer according to the invention and comprising the embodiment of optical scanning apparatus of FIGS. 1 through 3. FIG. 5 is a schematic perspective view of a slit means that can be used for an optical scanning apparatus according to the invention.

FIG. 6 is a schematic perspective view of the rotary plate of the slit means of FIG. 5, where the slit is not inclined.

FIG. 7 is a schematic chart of scanning start timings when the slit is held to the state of FIG. 6.

FIG. 8 is a schematic perspective view of the rotary plate of the slit means of FIG. 5 where the slit is slightly inclined.

FIG. 9 is a schematic chart of scanning start timings when the slit is held to the state of FIG. 8.

FIG. 10 is a schematic perspective view of the rotary plate of the slit means of FIG. 5 where the slit is further inclined.

FIG. 11 is a schematic chart of scanning start timings when the slit is held to the state of FIG. 10.

FIG. 12 is a schematic illustration of a slit that can be used for the purpose of the invention, where the slit is not inclined.

FIG. 13 is a chart illustrating the waveforms of the outputs of the synchronizing signal sensor of the embodiment of optical scanning apparatus using the slit of FIG. 12 when the slit is held to the state of FIG. 12.

FIG. 14 is a schematic illustration of the slit of FIG. 12, where the slit is inclined.

FIG. 15 is a chart illustrating the waveforms of the outputs of the synchronizing signal sensor of the embodiment of optical scanning apparatus using the slit of FIG. 12 when the slit is held to the state of FIG. 14.

FIG. 16 is a schematic illustration of another slit that

can be used for the purpose of the invention and has a notch, where the slit is not inclined.

FIG. 17 is a chart illustrating the waveforms of the outputs of the synchronizing signal sensor of the embodiment of optical scanning apparatus using the slit of FIG. 16 when the slit is held to the state of FIG. 16.

FIG. 18 is a schematic illustration of the slit of FIG. 16, where the slit is inclined.

FIG. 19 is a chart illustrating the waveform of the outputs of the synchronizing signal sensor of the embodiment of optical scanning apparatus using the slit of FIG. 16 when the slit is held to the state of FIG. 18.

FIGS. 20, 21 and 22 are schematic illustrations of possible positional relationships of a deflection plane and two fluxes of light that can appear in an optical scanning apparatus according to the invention.

FIGS. 23 and 24 are schematic illustrations showing how a point of spontaneous convergence is shifted.

FIG. 25 is a schematic chart illustrating the timings of the scanning starts of fluxes of light that are differentiated from each other.

FIG. 26 is a schematic illustration of a slit that can be used for the purpose of the invention, where the slit is inclined.

FIG. 27 is a schematic chart illustrating the timings of the scanning starts of fluxes of light that can be regulated by means of the slit of an optical scanning apparatus according to the invention.

FIG. 28 is a schematic perspective view of a slit means obtained by modifying that of FIG. 5.

FIG. 29 is a schematic perspective view of another slit means obtained by modifying that of FIG. 5.

FIG. 30 is a schematic perspective view of still another slit means obtained by modifying that of FIG. 5.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0012] Now, the present invention will be described in greater detail by referring to the accompanying drawings that illustrate preferred embodiments of the invention.

[0013] FIG. 1 is a schematic plan view of an embodiment of optical scanning apparatus according to the invention and comprising a light source unit 1 that may be a semiconductor laser array adapted to emit two fluxes of light, an optical system for incident light including a collimator lens 2, an aperture control 3 and a cylindrical lens 4 that are arranged along the path of the fluxes of light and a light deflector that may be a rotary polyhedral mirror 5. The rotary polyhedral mirror 5 is supported by a drive motor (not shown) and driven to rotate in the sense of arrow A at high speed.

[0014] A scanning optical system (focussing optical system) including $f\theta$ lenses 6a and 6b and a surface to be scanned 7 which may be that of a photosensitive drum are arranged on the path of most of the fluxes of light deflected by the deflecting plane 5a of the rotary polyhedral mirror 5. Additionally, a mirror 8 is arranged on the path of part of the fluxes of light passing through an end of the $f\theta$ lens system including the lenses 6a and 6b and a slit means 9 and a synchronizing signal sensor (photodetector) 10 are arranged on the path of the fluxes of light reflected by the mirror 8. The end of the $f\theta$ lens system including the lenses 6a and 6b and the slit means 9 form a synchronization detecting optical means whereas the synchronizing signal sensor 10 constitutes a synchronization detecting means. While the fluxes of light coming from the rotary polyhedral mirror 5 is partly focussed by an end of the $f\theta$ lens system including lenses 6a and 6b in the above description, an independent lens system may be used for focussing part of the fluxes of light coming from the rotary polyhedral mirror 5.

[0015] As shown in FIG. 2 in enlarged dimensions, the light source unit 1 comprises a pair of light sources 1a and 1b that are separated from each other both in a principal scanning direction X and in an auxiliary scanning direction Y. The collimator lens 2 transforms the divergent fluxes of light from the light sources 1a, 1b into convergent fluxes of light and the aperture control 3 trims and optimizes the profiles of the convergent fluxes of light coming from the collimator lens 2. The cylindrical lens 4 shows a predetermined refracting effect only in the auxiliary scanning direction Y so that it focusses the convergent fluxes of light coming from the aperture control near the deflection plane 5a of the rotary polyhedral mirror 5 along the auxiliary scanning direction Y and produces a linear image along the principal scanning direction X.

[0016] The $f\theta$ lenses 6a and 6b are adapted to form respective spot images of the fluxes of light coming from the rotary polyhedral mirror 5 on the surface to be scanned 7 and also actually scan the surface to be scanned 7 with the respective spots of light at a constant rate in the direction indicated by arrow B. During this operation, the $f\theta$ lenses 6a and 6b establish a conjugated relationship between the vicinity of the deflection plane 5a of the rotary polyhedral mirror 5 and the vicinity of the surface to be scanned 7 in the auxiliary scanning direction Y to provide the function of correcting any relative inclination thereof, while the end portions of the $f\theta$ lenses 6a and 6b focus the fluxes of light reflected by the rotary polyhedral mirror 5 with a predetermined angle on the synchronizing signal sensor 10 and the slit means 9 determines the positions along the principal scanning direction X of the fluxes of light focussed on the surface to be scanned 7. The synchronizing signal sensor 10 outputs a synchronizing signal for controlling the timings of scanning starts of the respective fluxes of light.

[0017] FIG. 3 is a schematic perspective view of the embodiment of optical scanning apparatus of FIG. 1. The components same as those of FIG. 1 are denoted respectively by the same reference symbols. In this embodiment, the light sources 1a and 1b are semiconductor lasers that are connected to a laser drive circuit 92. Central processing unit (CPU) 91 drives the light sources 1a and 1b independently by way of the laser drive circuit 92 according to the input video signal.

[0018] The two fluxes of light that are emitted from the respective light sources 1a and 1b and modulated according to the input video signal are collimated by the collimator lens 2 and, after passing through the aperture control 3, they are made to strike the deflection plane of the rotary polyhedral mirror (optical deflector) 5 as long linear images running along the principal scanning direction formed by the lens 4. The rotary polyhedral mirror 5 is driven to rotate at high speed by a spindle motor 95 in the sense indicated by arrow A to deflect the two fluxes of light. These two fluxes of light are then made to pass through the lenses 6a and 6b, reflected by a reflector mirror 94 and then focussed on the surface to be scanned 7 of the photosensitive drum 101 as so many spots of light. The spots of light are made to scan the surface to be scanned 7 along the principal scanning direction as the two fluxes of light are deflected. On the other hand, the photosensitive drum 101 is driven to rotate in the sense indicated by arrow C by means of a drive motor 93 and move relative to the spots of light along the auxiliary scanning direction. Thus an electrostatic latent image is formed on the photosensitive drum 101 as a result of the scanning motions of the spots of light along the principal scanning direction and the movement of the photosensitive drum 101 along the auxiliary scanning direction.

[0019] Meanwhile, part of the two fluxes of light deflected by the rotary polyhedral mirror 5 are reflected by the mirror 8, made to pass through the slit means 9 and received by the synchronizing signal sensor (photo-detector) 10. The synchronizing signal sensor 10 is connected to a synchronizing signal generating circuit 90, which circuit 90 generates a synchronizing signal according to the output of the synchronizing signal sensor 10. The synchronizing signal generated by the synchronizing signal generating circuit 90 is then input to the central processing unit 91, which unit 91 then controls the timings of scanning starts of the spots of light on the surface to be scanned 7 and hence the timing of drawing an image.

[0020] FIG. 4 is a schematic cross sectional view in the auxiliary scanning direction of an embodiment of electrophotographic printer according to the invention and comprising the above described embodiment of optical scanning apparatus. In FIG. 4, there are shown an electrophotographic printer 117 and the embodiment of optical scanning apparatus 100 as described above by referring to FIGS. 1 through 3. In FIG. 4, reference numeral 101 denotes a photosensitive drum adapted to

carry a electrostatic latent image and reference numeral 102 denotes a charging roller arranged above and held in contact with the photosensitive drum 101 in order to uniformly charge the surface of the photosensitive drum 101 with electricity. The surface of the photosensitive drum 101 is irradiated in an area downstream relative to the charging roller 102 with fluxes of light 103 coming from the optical scanning apparatus 100.

[0021] The fluxes of light 103 are modulated according to the input image data so that an electrostatic latent image is formed on the surface of the photosensitive drum 101 as the latter is irradiated with the fluxes of light 103. The electrostatic latent image is then developed into a toner image by means of developing unit 107 arranged to contact the photosensitive drum 101 at a position downstream relative to the spots where the surface of the photosensitive drum 101 is irradiated with the beams of light 103. Thereafter, the toner image is transferred onto paper 112 by means of transfer roller 108 arranged vis-a-vis under the photosensitive drum 101. While the paper 112 is stored in a paper cassette 109 located in front of the photosensitive drum 101 (and right to the drum 101 in FIG. 4), it may alternatively be fed with hand. A feed roller 110 is arranged at an end of the paper cassette 109 to feed the paper 112 in the paper cassette 109 to the paper feed path by way of register rollers 111.

[0022] Thus, the paper 112 onto which the unfixed toner image is transferred is then moved further to fixing unit arranged behind the photosensitive drum 101 (and left to the drum 101 in FIG. 4). The fixing unit contains in the inside a fixing roller 113 having a fixing heater (not shown) and a press roller 114 pressed against the fixing roller 113 so that, as the paper 112 fed from the transfer section of the printer is pressed and heated between the fixing roller 113 and the press roller 114, the unfixed toner image becomes fixed on the paper. The paper 112 now carrying the fixed image is then delivered to the outside of the printer by way of delivery rollers 116 provided behind the fixing roller 113.

[0023] Now, the slit means 9 that constitutes the most characteristic aspect of the present invention will be described in detail below.

[0024] Referring to FIG. 5 showing a perspective view of the slit means 9, it comprises a rotary plate 12 having a slit for allowing fluxes of light to pass there-through, a holder 13 for rotatably holding the rotary plate 12 and a rotary mechanism 14 for driving the rotary plate 12 to rotate. The rotary mechanism includes a drive rod 15 linked to the rotary plate 12 by way of a horizontal hole 13a and exposed to the inside of a vertical hole 13b formed in the holder 13. An adjuster screw 16 having a knob section 16a for adjusting the rotary position of the drive rod 15 is extending through a screw hole 13c bored in the holder 13 to abut the drive rod 15, which drive rod 15 is urged toward the adjuster screw 16 by means of a coil spring 17.

[0025] FIG. 6 is a schematic perspective view of the

rotary plate of the slit means of FIG. 5, where fluxes of light La and Lb emitted from respective light sources 1a and 1b are made to pass through the slit 11 that is not inclined, whereas FIG. 7 is a schematic chart of the scanning start points of the fluxes of light that are not displaced but the scanning end points are displaced from each other by an amount of displacement Xe. The sign of Xe in FIG. 7 is indicated as plus when the position of scanning end point for the flux of light Lb is displaced with reference to the position of scanning end point for the flux of light La. If the slit 11 is inclined under this condition as shown in FIG. 8, the scanning start points are negatively displaced by an amount of displacement Xs as shown in FIG. 9 to reduce the amount of displacement Xe of the scanning end points. The sign of Xs in FIG. 9 is indicated in the same manner as mentioned above for Xe. As the slit 11 is further inclined as shown in FIG. 10, the amount of displacement Xs of the scanning start points is increased to by turn reduce the amount of displacement Xe of the scanning end points as shown in FIG. 11.

[0026] Thus, it is possible to adjust the timings of detecting the fluxes of light La and Lb for the synchronizing signal sensor 10 and hence their scanning start points can be adjusted by appropriately inclining the slit 11 of the slit means 9 in the auxiliary scanning direction Y. This will be described further below.

[0027] FIG. 12 is a schematic illustration of a slit that can be used for the purpose of the invention, where the slit is not inclined, and FIG. 13 is a chart illustrating the waveforms of the outputs of the synchronizing signal sensor when the slit is held to the state of FIG. 12 and the rising edges of the fluxes of light La and Lb are made to agree with each other but the quantities of light of the fluxes of light La and Lb are differentiated. Note that, in FIG. 13, the solid curved line indicates the flux of light La, whereas the broken curved line indicates the flux of Lb. The reference line drawn at the height of the offset value of O is used to determine if the fluxes of light La and Lb have passed through the synchronizing signal sensor 10. Thus, FIG. 13 illustrates that there is a time lag Δt between the flux of light La and the flux of light Lb that have gone over the offset value O and the scanning start of the flux of light La is behind that of the flux of light Lb by time Δt .

[0028] On the other hand, FIG. 14 is a schematic illustration of the slit same as that of FIG. 12, where the slit is inclined, and FIG. 15 is a chart illustrating the waveforms of the outputs of the synchronizing signal sensor when the slit is held to the state of FIG. 14. Then, both the flux of light La and the flux of light Lb cross the offset value line O at the same time and the synchronizing signal sensor 10 issues a signal that makes the scanning start point of the flux of light La and that of the flux of light Lb agree with each other.

[0029] If the rotary plate 12 of the slit 11 has a notched section 12a as shown in FIG. 16, there is also a time lag Δt between the flux of light La and the flux of

light Lb that have gone over the offset value O and the scanning start of the flux of light La is behind that of the flux of light Lb by time Δt as shown in FIG. 17. However, if the slit 11 is inclined as shown in FIG. 18, the two fluxes of light La and Lb no longer show any time lag Δt and the synchronizing signal sensor issues a signal that makes the scanning start point of the flux of light La and that of the flux of light Lb agree with each other as shown in FIG. 19.

[0030] Furthermore, if the time lag between the time when the synchronizing signal sensor 10 detects the flux of light La and the time when the sensor 10 detects the flux of light Lb and the time lag between the time when the flux of light La crosses the level of the image height for the scanning start point and the time when the flux of light Lb crosses the level of the image height for the scanning start point are attributable to the difference in the magnifying power or some other causes, the synchronizing signal sensor 10 is made to issue a signal for making the scanning start points of the two fluxes of light agree with each other by inclining the slit 11. The same effect is obtained also when the fluxes of light La and Lb from the collimator lens are parallel or divergent fluxes.

[0031] On the other hand, since the fluxes of light La and Lb entering the rotary polyhedral mirror 5 are converging fluxes, the image point of the flux of light La and that of the flux of light Lb are displaced from each other along the principal scanning direction even if the scanning start points of the two fluxes agree with each other in the principal scanning direction X. In other words, the positional relationship between the points of spontaneous convergence of the fluxes of light La and Lb established by the optical means for incident light is modified as the rotary polyhedral mirror 5 rotates to move the reflection point along the optical axis of the optical means for incident light.

[0032] For instance, if the angle of deflection of the deflection plane 5a of the rotary polyhedral mirror 5 is equivalent for both of the fluxes of light La and Lb, the fluxes of light La and Lb scan different image heights. Then, if the angle of deflection of the flux of light La is differentiated from that of the flux of light Lb by providing a time lag between the time when the flux of light La starts scanning and the time when the flux of light Lb starts scanning so that the points of scanning start of the fluxes agree with each other, the deflection plane 5a is positionally shifted forwardly or rearwardly when the angle of deflection is modified because the center of rotation of the deflection plane 5a is not found on the deflection plane 5a itself. Additionally, the positional shift of the deflection plane 5a is not proportional to the angle of deflection but approximates a parabola that can be expressed by a quadratic function.

[0033] Therefore, if the fluxes of light La and Lb are located substantially at a same spot on the deflection plane 5a when the image height is equal to zero as shown in FIG. 20 and the fluxes of light La and Lb are

$$-2 < \Delta X_e / \Delta X_s < -0.5 \quad (2).$$

[0037] Thus, both the scanning optical system of the above embodiment and an image forming apparatus using such an optical system can provide high quality images with a reduced level of jitter when the requirements of the above equations (1) and (2) are met. Additionally, the load for signal processing operations can be reduced to allow the use of a simply configured system for processing signals in order to produce images at high speed by making the lapse of time between the time when the synchronizing signal sensor 10 outputs a synchronizing signal and the time when a corresponding scanning operation is started is made equal for both of the fluxes of light La and Lb.

[0038] If it is not possible to use a rotary slit means 9 for some reasons such as manufacture-related problems and/or the requirements to be met for the arrangement of components, a slit means 21 having one of the lateral sides of the slit made tiltable as shown in FIG. 28 may alternatively be used. The slit means of FIG. 28 comprises a fixed slit member 22 providing a lateral side 22a of the slit, a rotary member 23 providing another lateral side 23a of the slit, a holder 24 for rotatably holding the rotary member 23, an adjuster screw 25 for adjusting the rotary position of the rotary member 23 and a coil spring 26 for urging the rotary member counter-clockwise, the slit 27 being defined by the two lateral sides 22a and 23a.

[0039] If it is possible to know the angle of inclination of the slit 11 in advance, the slit means 9 may be replaced by a slit means 31 as shown in FIG. 29. The slit means 31 comprises members 32 and 33 having respective inclined lateral sides 32a, 33a that define the inclined slit 34.

[0040] Still alternatively, a slit means 35 as shown in FIG. 30 may be used depending on the manufacturing conditions. The illustrated slit means 35 comprises members 36 and 37 having respective inclined lateral sides 36a, 37a that define a V-shaped slit 38. With this arrangement, if the flux of light L_a or L_b that passes through a lower portion of the slit 38 has to be used for starting a scanning operation, a falling edge of the output signal of the synchronizing signal sensor 10 may be used for determining the timing of the start of the scanning operation, although it may be appreciated that the above description holds true for the slit means 21 shown in FIG. 28 and having an adjusting means.

[0041] The applicability of the present invention is by no means limited to the above embodiments, which may be modified in many various different ways without departing from the scope of the invention as defined by the claims that follow.

$$\Delta X_s \cdot \Delta X_e < 0 \quad (1) \quad 55 \quad \text{Claims}$$

and also the requirement of formula (2) below:

Claims

1. An optical scanning apparatus for scanning a surface to be scanned (7) with a plurality of fluxes of

- light along a principal scanning direction, characterized by comprising a plurality of light sources (1a, 1b) arranged at intervals along an auxiliary scanning direction perpendicularly to said principal scanning direction, an optical deflector (5) for deflecting the plurality of fluxes of light emitted from said plurality of light sources, an optical system for incident light (2, 3, 4) adapted to lead said plurality of fluxes of light emitted from said plurality of light sources to said optical deflector, an imaging optical system (6a, 6b) for forming images of said plurality of fluxes of light deflected by said optical deflector on the surface to be scanned, a photodetector (10) for detecting part of said plurality of fluxes of light deflected by said optical deflector and outputting a synchronizing signal for controlling the timing of the scanning start of each of the fluxes of light and a slit (11, 27, 34, 38) arranged between said optical deflector and said photodetector, said slit being inclined relative to said auxiliary scanning direction.
2. An optical scanning apparatus according to claim 1, further comprising:
- a holder (13, 22, 24) having a mechanism (14) for adjusting the angle of said slit relative to said auxiliary scanning direction.
3. An optical scanning apparatus according to claim 2, wherein
- said slit is arranged in a rotary plate (12) rotatably held by said holder (13).
4. An optical scanning apparatus according to claim 3, wherein
- a drive rod (15) is linked to said rotary plate (12) and said holder is provided with a spring (17) for urging said drive rod in a predetermined direction and an adjuster screw (16) kept in contact with said drive rod to hold said drive rod to a predetermined position against the resilient force of said spring.
5. An optical scanning apparatus according to claim 2, wherein
- said slit is defined by a fixed lateral side (22a) of said holder and a movable lateral side (23a) of a rotary member (23) rotatably held by said holder;
- said holder being provided with a spring (26) for urging said rotary member (23) in a predetermined direction and an adjuster screw (25) kept in contact with said drive rod to hold said drive rod to a predetermined position against the resilient force of said spring.
6. An optical scanning apparatus according to any of claims 1 through 5, wherein
- said plurality of light sources (1a, 1b) are arranged at intervals along the principal scanning direction and said optical system for incident light (2, 3, 4) is adapted to make the plurality of fluxes of light emitted from the light sources strike the optical deflector (5) as convergent fluxes of light or divergent fluxes of light.
7. An optical scanning apparatus according to any of claims 1 through 6, wherein the requirement expressed by formula
- $$\Delta X_s \cdot \Delta X_e < 0$$
- is satisfied,
- where ΔX_s is the amount of positional displacement of the scanning start point of the flux of light emitted from one of said plurality of light sources (1a, 1b) in the principal scanning direction with reference to the scanning start point of the flux of light emitted from another one of said plurality of light sources in the principal scanning direction and ΔX_e is the amount of positional displacement of the scanning end point of the flux of light emitted from said first one of said plurality of light sources in the principal scanning direction with reference to the scanning end point of the flux of light emitted from said second one of said plurality of light sources in the principal scanning direction is ΔX_e on the surface to be scanned (7), and where ΔX_s and ΔX_e take positive values when the displacement direction is the same as the principal scanning direction.
8. An optical scanning apparatus according to claim 1, wherein
- the elapse of time between the time when said photodetector (10) detects part of the flux of light emitted from said first one of said plurality of light sources (1a, 1b) and outputs a synchronizing signal and the time when the flux of light emitted from said first one of said plurality of light sources starts scanning is equal to the elapse of time between the time when said photodetector detects part of the flux of light emitted from said second one of said plurality of light sources and outputs a synchronizing signal and the time when the flux of light emitted from said second one of said plurality of light sources starts scanning.
9. An optical scanning apparatus according to claim 7, the requirement expressed by formula

$$-2 < \Delta X_e / \Delta X_s < -0.5$$

is also satisfied.

10. An optical scanning apparatus according to any of 5
claims 1 through 9, wherein

said plurality of light sources (1a, 1b) are semi-
conductor lasers;
said optical scanning apparatus further com- 10
prising laser drive circuits (92) for driving said
semiconductor lasers, a synchronizing signal
generating circuit (90) for generating a syn-
chronizing signal on the basis of the output of
said photodetector (10) and a central process- 15
ing unit (91) for receiving the synchronizing sig-
nal output from said synchronizing signal
generating circuit and controlling the light emis-
sion timings of said semiconductor lasers inde-
pendently by means of said laser drive circuits. 20

11. An optical scanning apparatus according to any of
claims 1 through 10, wherein

said optical deflector is a polygon mirror (5). 25

12. An optical scanning apparatus according to any of
claims 1 through 11, wherein

said optical system for incident light comprises, 30
collimator lens (2), an aperture control (3) and
a cylindrical lens (4).

13. An optical scanning apparatus according to any of
claims 1 through 12, wherein 35

said imaging optical system comprises f θ
lenses (6a, 6b).

14. An image forming apparatus comprising an optical 40
scanning apparatus according to any of claims 1
through 13 and adapted to form an image on a sur-
face to be scanned by driving said plurality of light
sources independently according to a video signal. 45

15. An electrophotographic printer comprising an opti-
cal scanning apparatus (100) according to any of
claims 1 through 13, a photosensitive body (101)
arranged on the surface to be scanned of said opti-
cal scanning apparatus, a developing unit (107) for 50
developing an electrostatic latent image formed by
scanning the surface of said photosensitive body
with said plurality of fluxes of light as toner image,
an image transfer unit (108) for transferring the
developed toner image onto paper and a fixing unit 55
(113, 114) for fixing the toner image transferred on
the paper.

FIG. 1

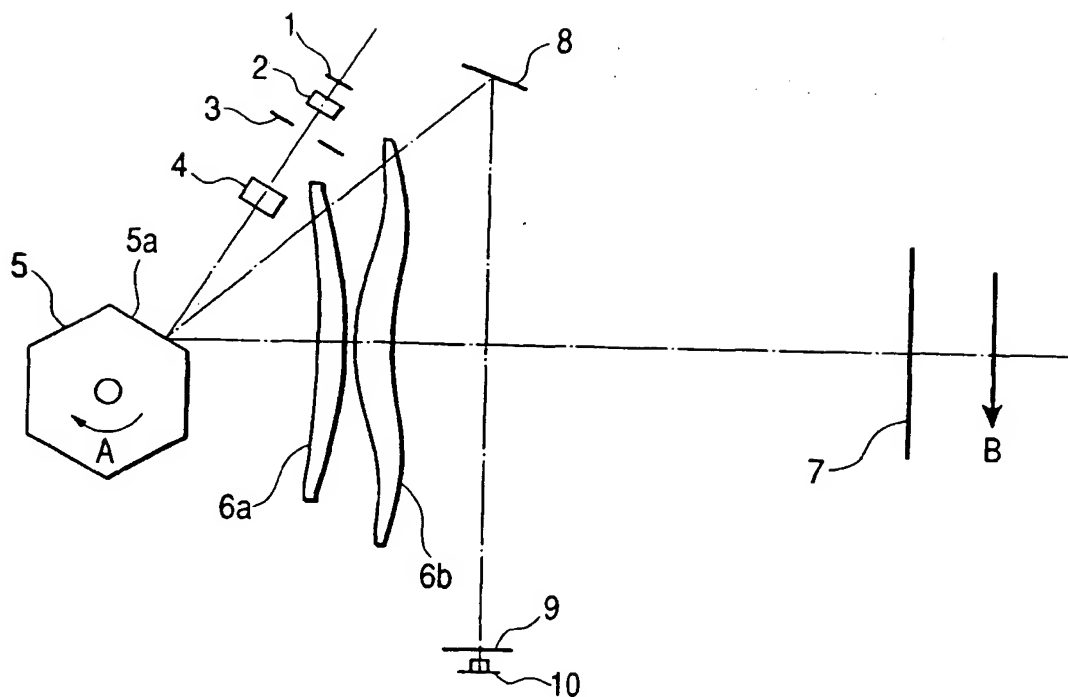


FIG. 2

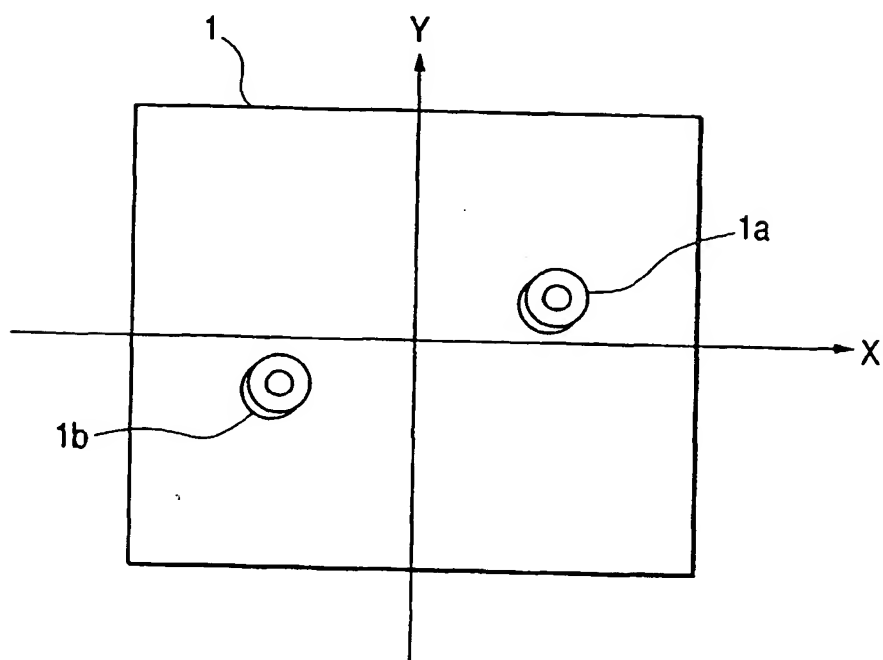


FIG. 3

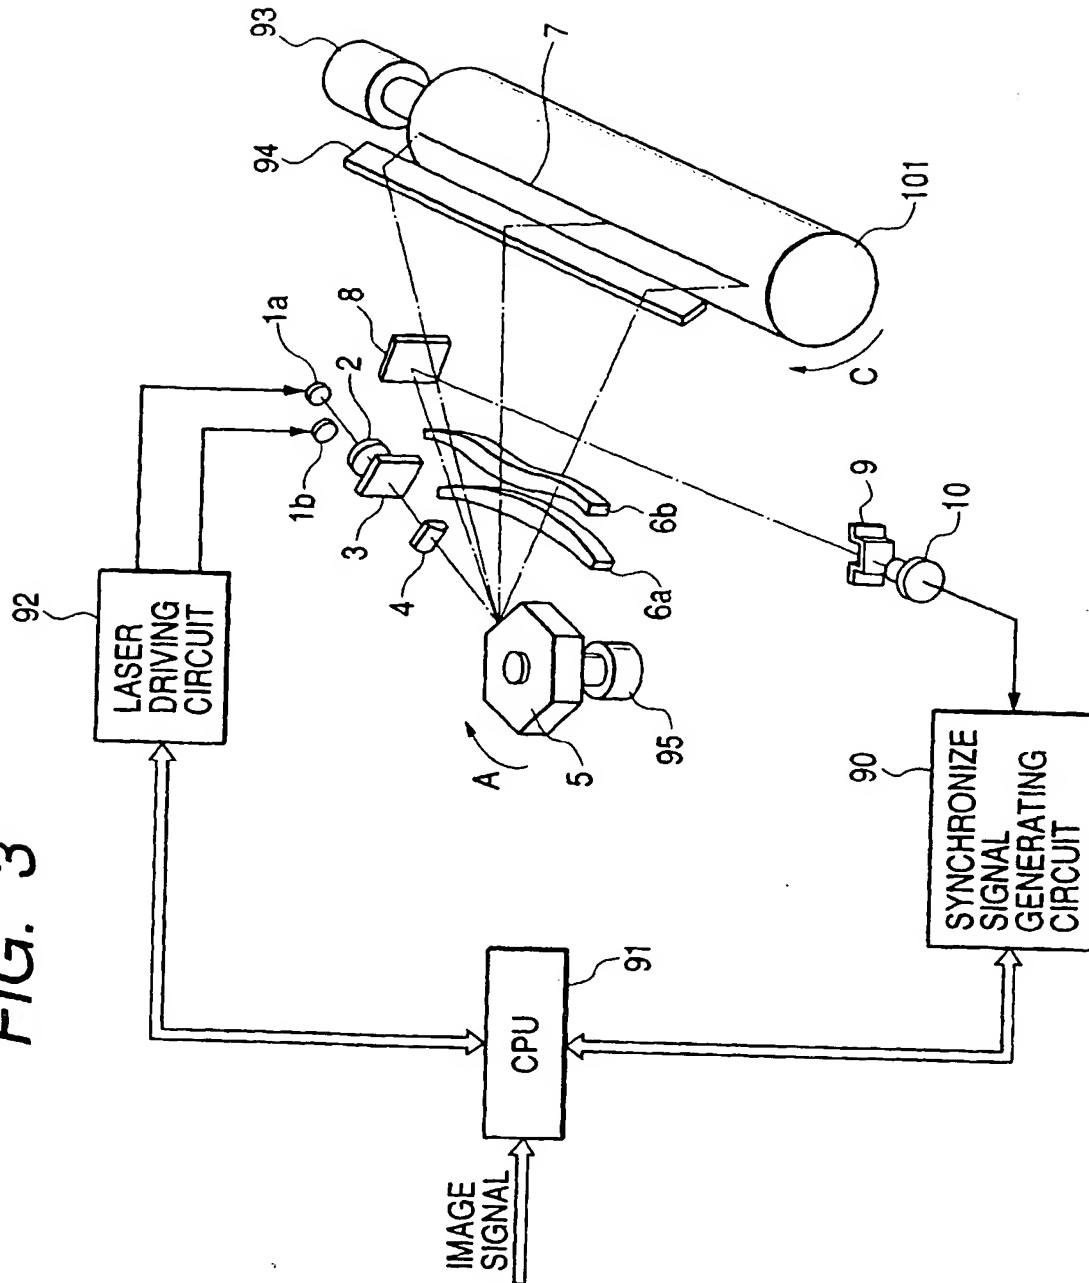


FIG. 4

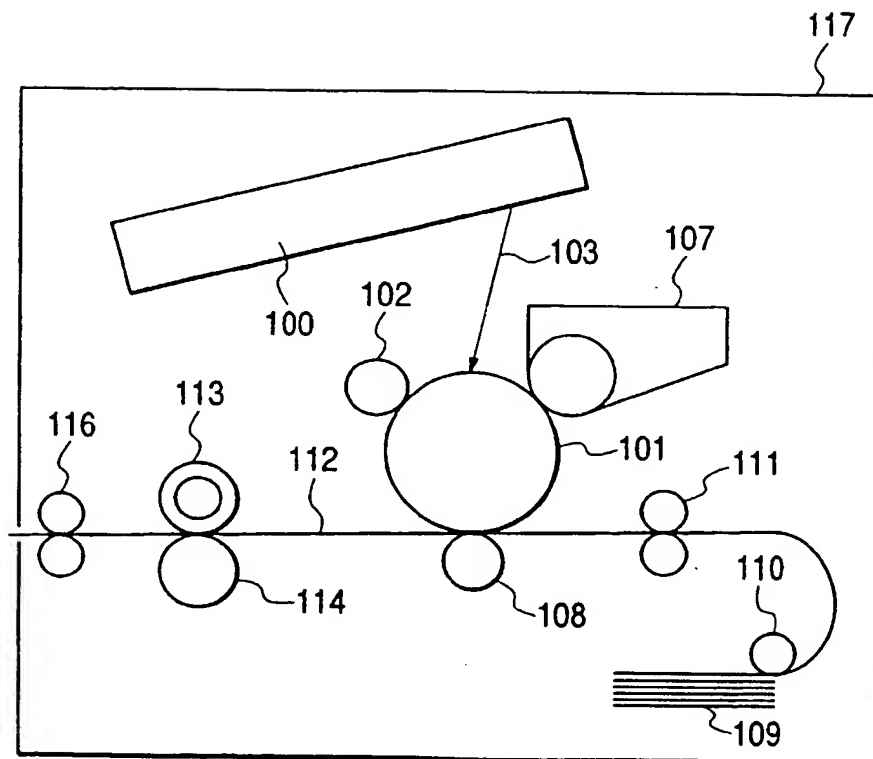


FIG. 5

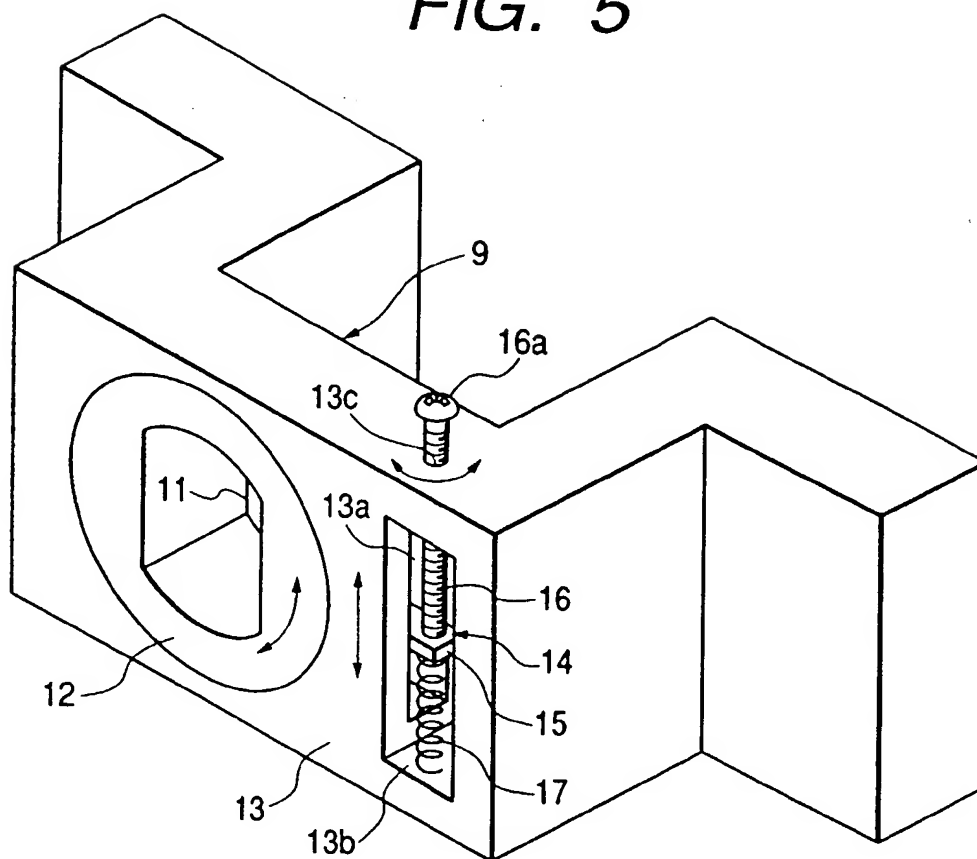


FIG. 6

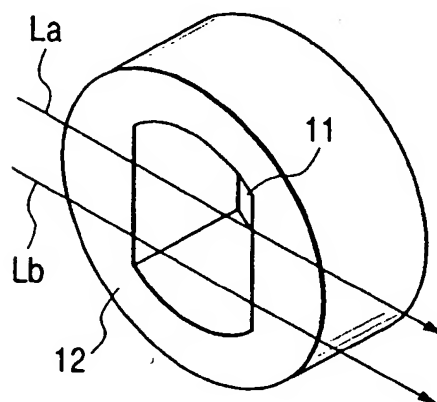


FIG. 7

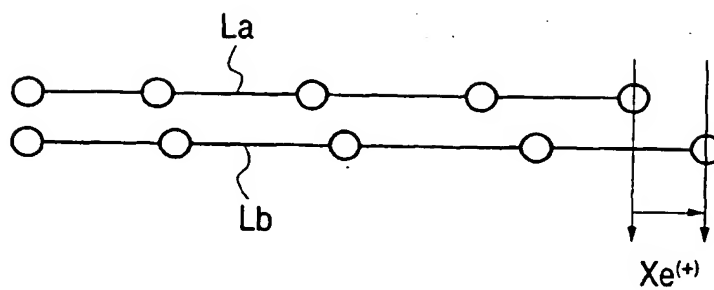


FIG. 8

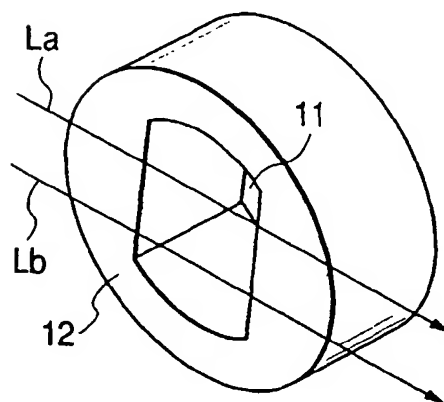


FIG. 9

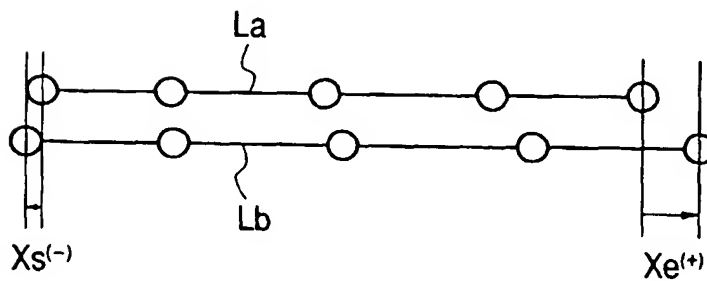


FIG. 10

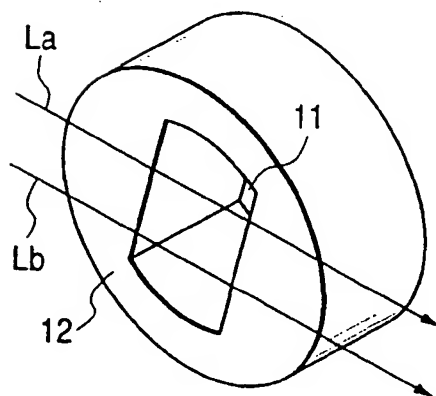


FIG. 11

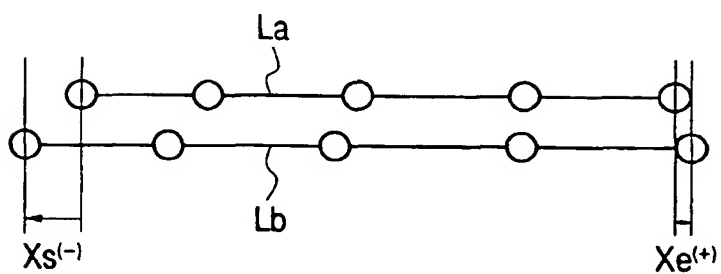


FIG. 12

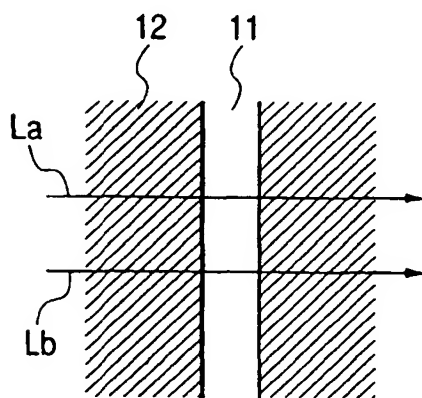


FIG. 13

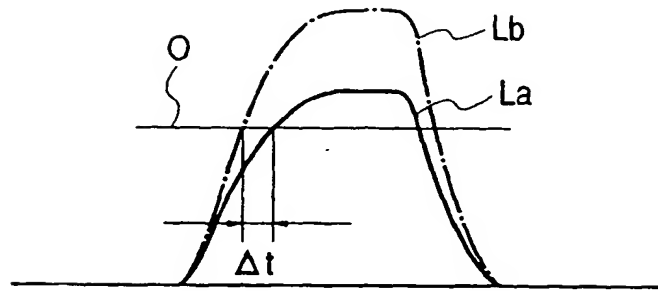


FIG. 14

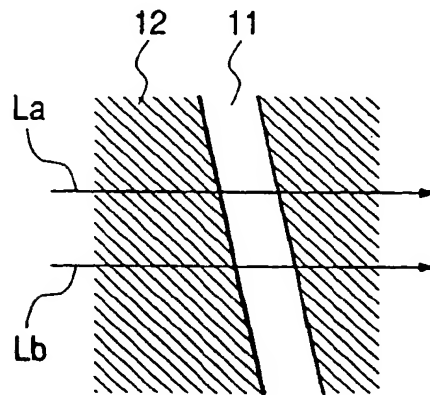


FIG. 15

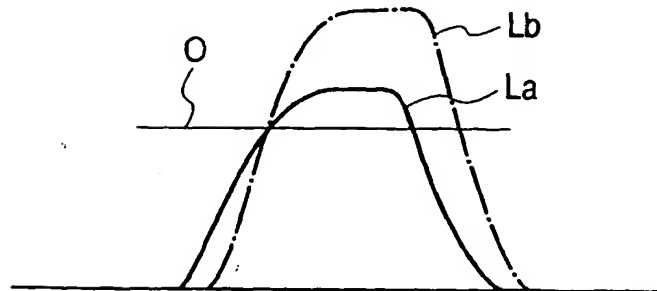


FIG. 16

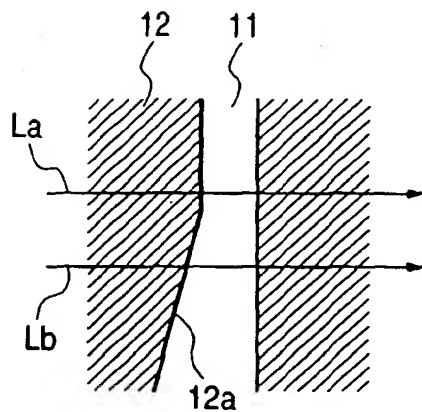


FIG. 17

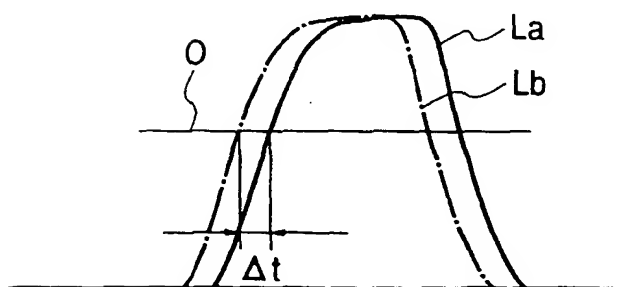


FIG. 18

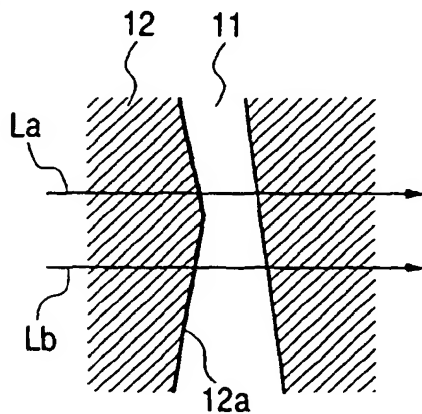


FIG. 19

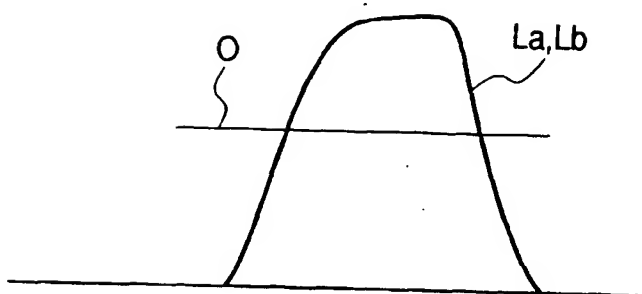


FIG. 20

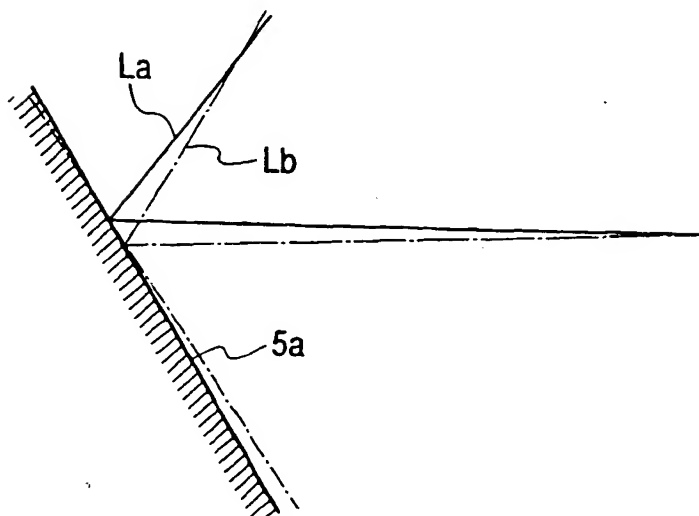


FIG. 21

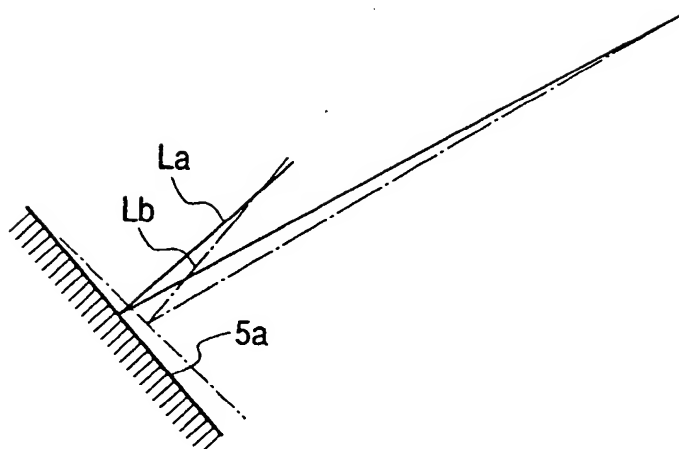


FIG. 22

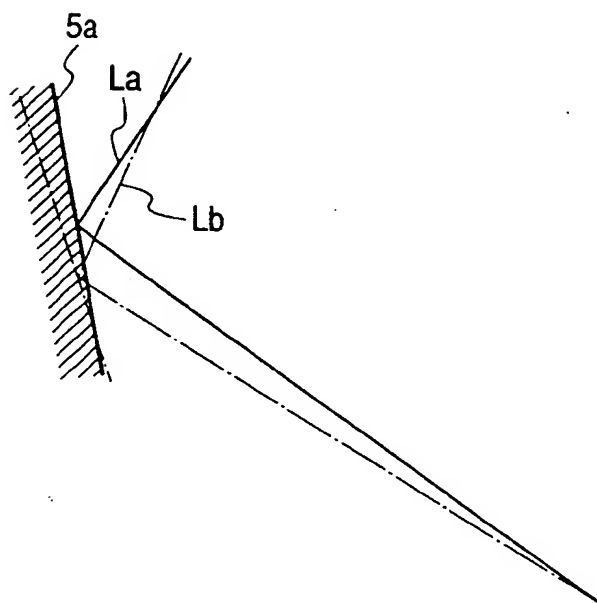


FIG. 23

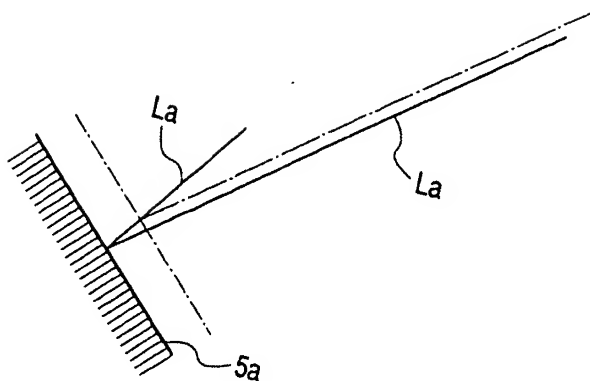


FIG. 24

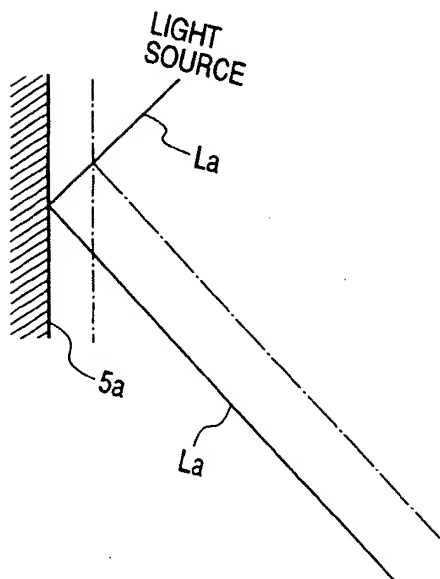


FIG. 25

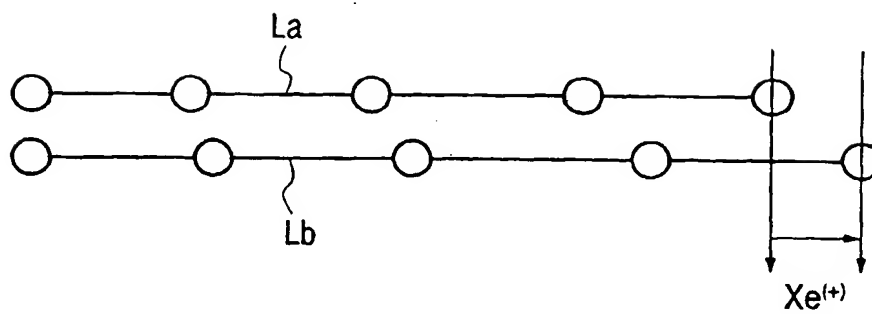


FIG. 26

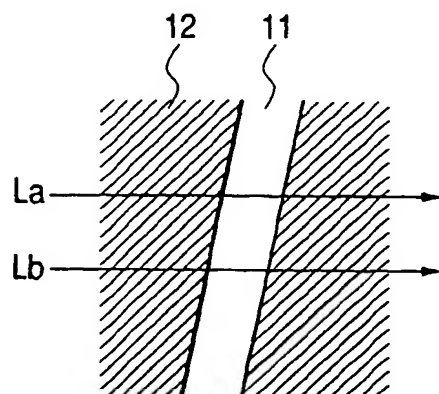


FIG. 27

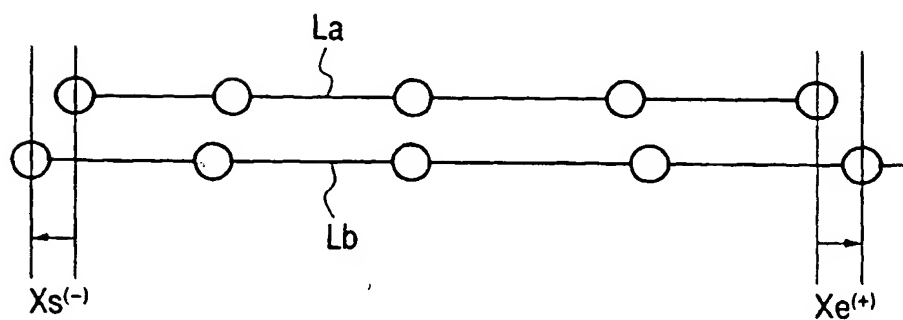


FIG. 28

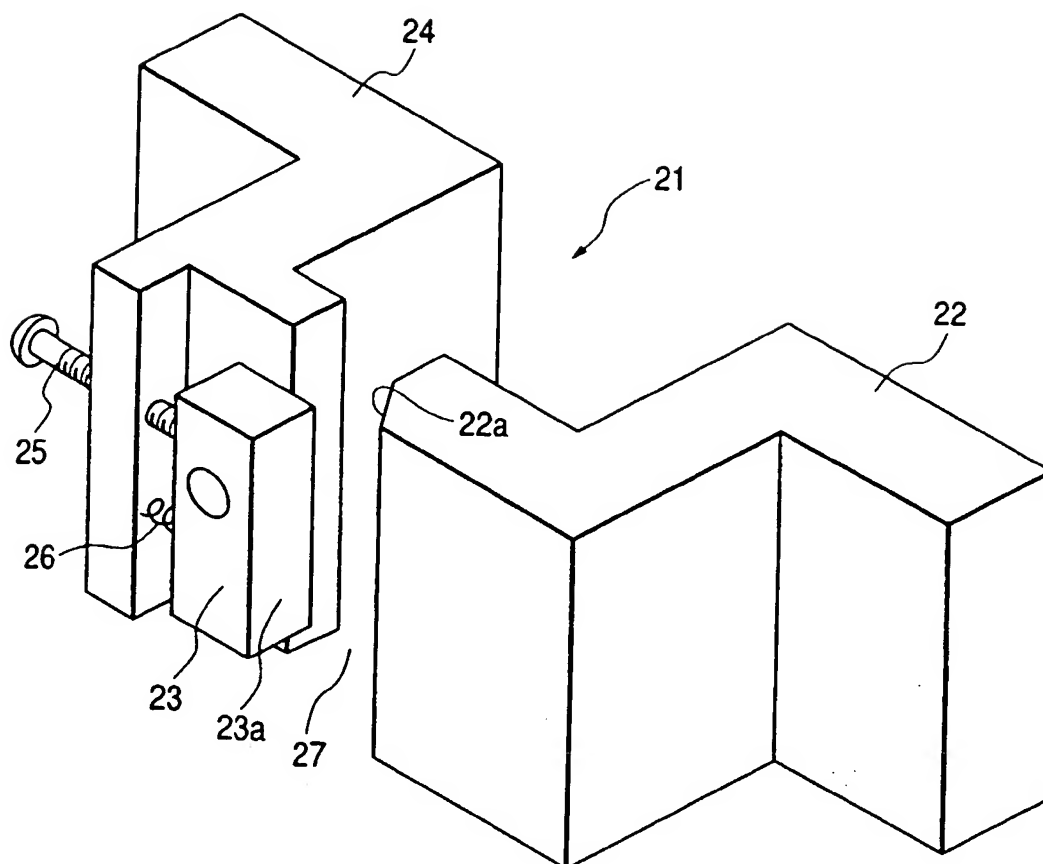


FIG. 29



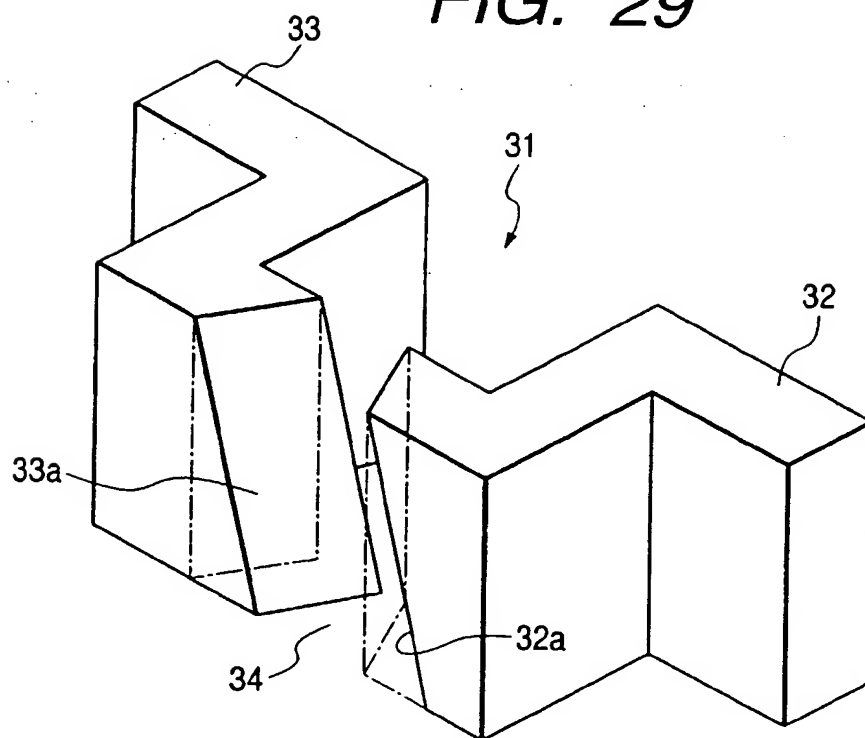


FIG. 30

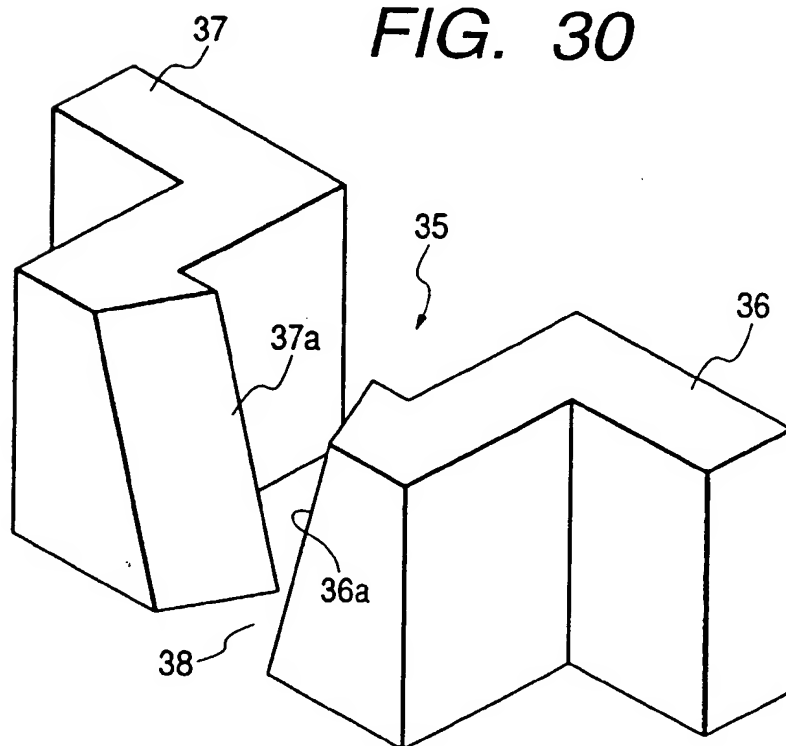



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 024 012 A3

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
20.12.2000 Bulletin 2000/51

(51) Int. Cl.⁷: **B41J 2/47**, G02B 26/12,
H04N 1/053, G06K 15/12

(43) Date of publication A2:
02.08.2000 Bulletin 2000/31

(21) Application number: **00101301.0**

(22) Date of filing: **22.01.2000**

(84) Designated Contracting States:
DE FR GB IT NL
Designated Extension States:
AL LT LV MK RO SI

(72) Inventors:
• **Yoshida, Hiroki**
Ohta-ku, Tokyo (JP)
• **Ishibe, Yoshihiro**
Ohta-ku, Tokyo (JP)

(30) Priority: **26.01.1999 JP 1746399**


(71) Applicant:
CANON KABUSHIKI KAISHA
Tokyo (JP)

(74) Representative: **Weser, Wolfgang**
Weser & Kollegen,
Patentanwälte,
Radeckestrasse 43
81245 München (DE)

(54) **Optical scanning apparatus and image forming apparatus and electrophotographic printer using such scanning apparatus**

(57) An optical scanning apparatus is capable of scanning a surface with a plurality of fluxes of light along a principal scanning direction. In the apparatus, a plurality of fluxes of light are emitted by a plurality of light sources arranged at intervals along an auxiliary scanning direction perpendicular to the principal scanning direction. The plurality of fluxes of light are lead to an optical deflector via an optical system for incident light and deflected by the optical deflector. Most part of the deflected fluxes of light are lead to the surface via an imaging optical system for scanning the surface, while small part of the deflected fluxes of light are lead to a photodetector to generate a synchronizing signal for controlling the timing of the scanning start of each of the fluxes of light. A slit is arranged between the optical deflector and the photodetector and the slit is inclined relative to the auxiliary scanning direction, whereby the scanning start timings for the plurality of fluxes of light are adjusted. The optical scanning apparatus is used in an image forming apparatus or an electrophotographic printer.

FIG. 1

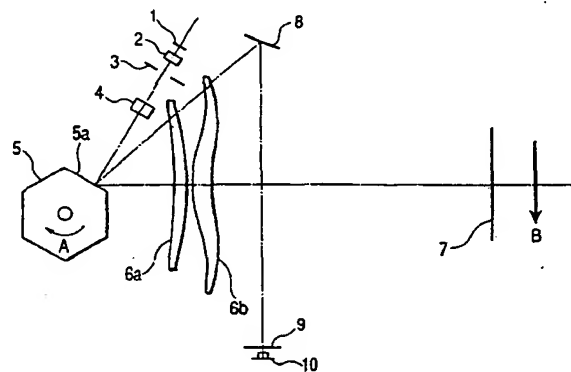

EP 1 024 012 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 00 10 1301

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	US 4 933 549 A (KANEKO YOSHIO ET AL) 12 June 1990 (1990-06-12) * column 4, line 30 - column 10, line 9; figure 3 *	1	B41J2/47 G02B26/12 H04N1/053 G06K15/12
A	US 5 663 558 A (SAKAI TOSHIO) 2 September 1997 (1997-09-02) * column 3, line 39 - column 9, line 54; figures *	1	
A	PATENT ABSTRACTS OF JAPAN vol. 1996, no. 11, 29 November 1996 (1996-11-29) & JP 08 179228 A (MINOLTA CO LTD), 12 July 1996 (1996-07-12) * abstract *	1	
A	PATENT ABSTRACTS OF JAPAN vol. 014, no. 472 (P-1116), 15 October 1990 (1990-10-15) & JP 02 188713 A (CANON INC), 24 July 1990 (1990-07-24) * abstract *	1	
A	PATENT ABSTRACTS OF JAPAN vol. 1997, no. 11, 28 November 1997 (1997-11-28) & JP 09 197307 A (RICOH CO LTD), 31 July 1997 (1997-07-31) * abstract *	1	
A	PATENT ABSTRACTS OF JAPAN vol. 1996, no. 07, 31 July 1996 (1996-07-31) & JP 08 076041 A (NEC CORP), 22 March 1996 (1996-03-22) * abstract *	1	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 30 October 2000	Examiner De Groot, R
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03 82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 10 1301

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

30-10-2000

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4933549 A	12-06-1990	NONE	
US 5663558 A	02-09-1997	JP 8021969 A JP 8021970 A	23-01-1996 23-01-1996
JP 08179228 A	12-07-1996	NONE	
JP 02188713 A	24-07-1990	NONE	
JP 09197307 A	31-07-1997	NONE	
JP 08076041 A	22-03-1996	JP 2601214 B	16-04-1997

EPO FORM P0458

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82